

## Container facilities – RESTROOM MODEL LINE

### 24'-6" Container Restroom – 6 Private Stalls

#### **General Features:**

Enclosure: 24' Container  
Approx. Shipping Weight: 8,800 lbs.  
Approx. Footprint: 24'-0" X 8'-0"  
Approx. Overall Dims: 24-0" X 9'-2" X 8'-6"

#### **Lifting Methods:**

Bottom Corner Blocks: Yes  
Top Corner Blocks: Yes  
Forklift: Yes  
Other: Yes (Overhead crane w/lifting lugs)

#### **Electrical Data:**

Load Center Main Amps: 100  
Voltage & Frequency: 240/60Hz/single phase  
Demand KVA & Amps: 22/100

#### **Interior/Exterior Specs:**

Wall/Ceiling Insulation: R-14  
Entry Door/Window: 7-door (counting utility & service doors)/0  
Mechanical Room (LXW): 5' X 7'-6"  
Private Deluxe Stall\*: 6 (\*Components: toilet, sink, towel dispenser, sanitary napkin supply/disposal bins, purse/cargo hanger, mirror, LED light, trash bin (55- gallon), deadbolt with occupancy display)  
Rugged entry stair set: 6  
Water heater 1 (18-gallon/240V/3800watts)

#### **Heating/Cooling Specs:**

Cooling Capacity/BTUH: 36,000 (4-zone hyper heat ductless system)

#### **Optional Features:**


Low fill-water alert  
Interface with security system  
Security cameras

#### **Suggested Site Attributes:**

- level ground, with good drainage and free of debris
- no overhead obstructions (that could hinder delivery or pickup)
- concrete slab (ideal, but not necessary)
- gravel bed (ideal, but not necessary, adds drainage and stability)
- support blocks & ground locks should be used after installation

#### **Transport:**

Lifting capacity of 10,000#

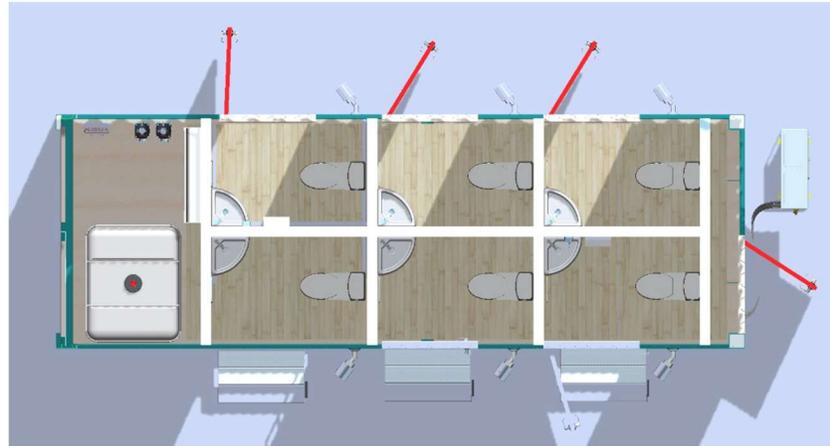

Item No. 86-00009-00