

Container facilities – RESTROOM MODEL LINE

24'-6" Container Restroom – Open Plan

General Features:

Enclosure: 24'-6" Container
Approx. Shipping Weight: 8,800 lbs.
Approx. Footprint: 24'-6" X 8'-0"
Approx. Overall Dims: 24'-6" X 9'-2" X 8'-6"

Lifting Methods:

Bottom Corner Blocks: Yes
Top Corner Blocks: Yes
Forklift: Yes
Other: Yes (Overhead crane w/lifting lugs)

Electrical Data:

Load Center Main Amps: 100
Voltage & Frequency: 240/60Hz/single phase
Demand KVA & Amps: 22/100

Interior/Exterior Specs: *depending on floor plan

Wall/Ceiling Insulation: R-14
Entry Door/Window: 3 or 4-door* (counting utility & service doors)
Mechanical Room (LXW): 5' X 7'-6"
Private Deluxe Stall*: 1-2* (Components: toilet, sink, towel dispenser, sanitary napkin supply/disposal bins, purse/cargo hanger, mirror, LED light, trash bin (55- gallon), deadbolt with occupancy display)
Standard Stall: 2
Common Wash Station: 2 (sink/towel dispenser/mirror/trash bin (55-gallon))
Corner Sink: 1 (in common area)
Rugged entry stair set: 3-4*
Water heater 1 (18-gallon/240V/3800watts)

Heating/Cooling Specs:

Cooling Capacity/BTUH: 18,000 (ducted, forced air system with 17,000 BTU electric supplement coil)

Optional Features:


Low fill-water alert
Interface with security system
Security cameras

Suggested Site Attributes:

-level ground, with good drainage and free of debris
-no overhead obstructions (that could hinder delivery or pickup)
-concrete slab (ideal, but not necessary)
-gravel bed (ideal, but not necessary, adds drainage and stability)
-support blocks & ground locks should be used after installation

Transport:

Lifting capacity of 10,000#

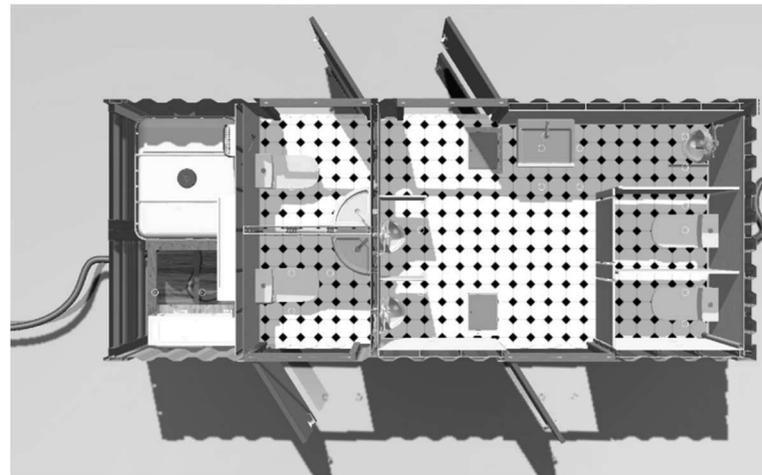

Item No. 86-00002-00

PRICE: \$75,000

Some weights and dimensions can vary based on container options. Other voltages available. KVA based on NEC load calculation method and may vary based on actual customer equipment.